

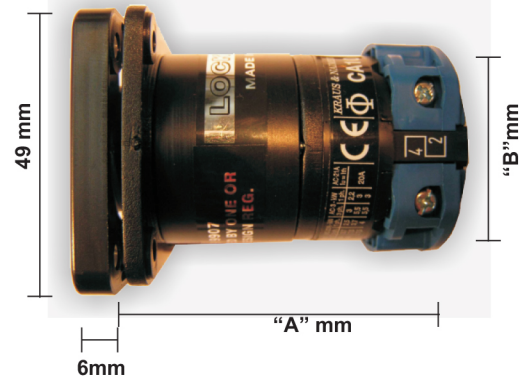


“R Series” Removal Cylinder

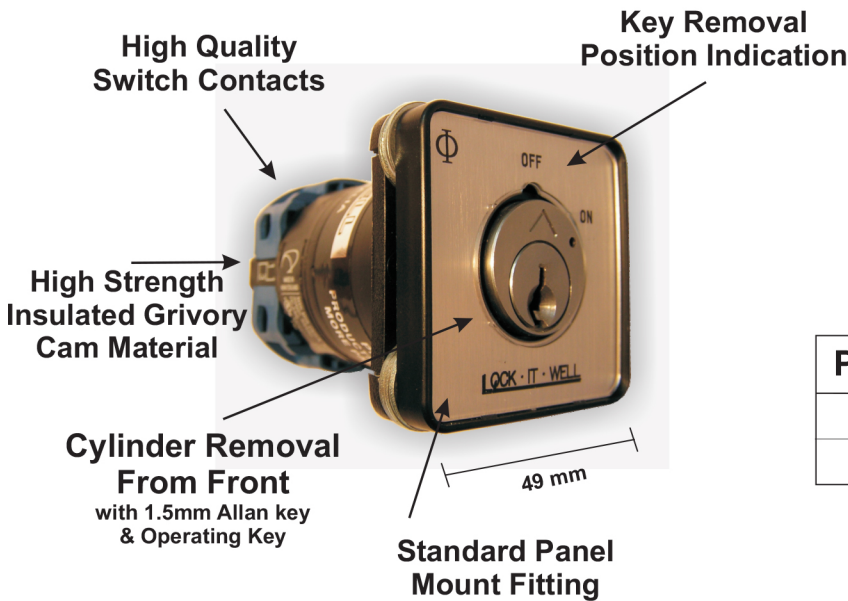

Panel Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	61mm	70mm	43mm
Digit 5 = 2	65mm	77mm	47mm


Max Material Thickness 4mm

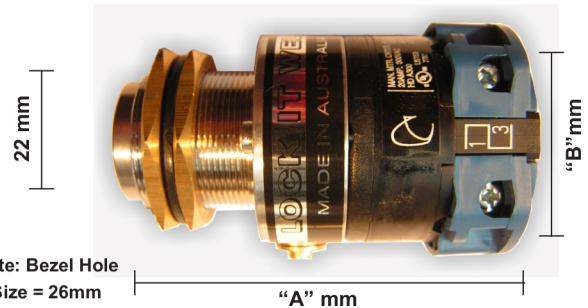

Lift Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	71mm	81mm	43mm
Digit 5 = 2	75mm	88mm	47mm

Thread Max Material Thickness 22mm
Cylinder Max Material Thickness 2.5mm

Optional Mounting Types

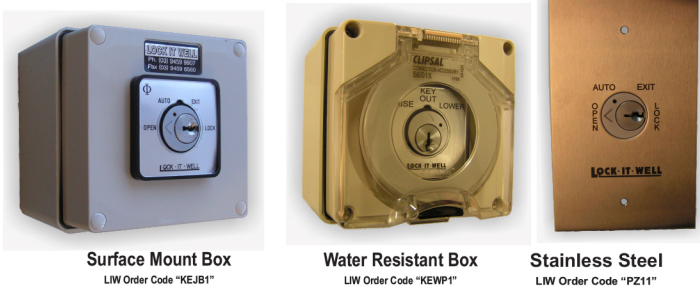

The "R" series uses a unique removable cylinder enabling convenient master keying and key recombination of rental properties. The key may be removed or held captive in any switched position. This series is available in a variety of mounting types including panel, lift, bezel and wall plate. It is also available in a wide range of switching configurations.

Features

- Incorporates specialised lock cylinders for key removable in multiple positions.
- Cylinder removable from front without risk of the switch falling apart.
- May be master keyed into most common lock brands and high security lock systems.
- Electrical isolated cylinder for added safety

Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2020

R-Series
2020

How To Order

RL121003

Digit 1
"Removable Series"



The Example shown is for a R-Series Lockwood 6-pin inline, Panel mount, with key removal in 2 positions at 240V at 20 amp switch.

<p>Digit 2 "Lock Type"</p> <p>A Astra B Bilock D Abloy (Protec & Disklock) E Efco G Kaba Modular H Kaba Gege K Kaba Quattro (Old Size Core) L Lockwood (6-Pin Inline) P Binary Plus S Schlage T Lockwood Twin V Lockwood V7 W Evva O Other</p>	<p>Digit 3 "Mounting"</p> <p>1 Panel </p> <p>2 Bezel </p> <p>3 Lift </p>	<p>Digit 4 "Key Removal"</p> <p>1 Position 2 Position 3 Position 4 Position 5 Position 6 Position</p> <p>Spring Return=1 Position. Note: Specify if Captive Positions are Required.</p>	<p>Digit 5 "Electrical Rating"</p> <p>1 -Mains Voltage (Standard) Silver Button Contacts AC21A 20Amp DC1 24V-20Amp</p> <p>2 -Mains Voltage/Amps Silver Button Contacts AC21A 32Amp DC1 24V-25Amp</p> <p>4 -Low Current (Low Bounce) Silver H-Bridge Contacts AC21A 12V-5Amp DC1 12V-3Amp</p> <p>7 -PLC Data (Low Bounce) Gold H-Bridge Contacts AC21A 12V-2Amp DC1 12V-1.5Amp</p>	<p>Digit 6,7&8 "Switch Circuits"</p> <p>Note: Refer to full switch circuits for other switch configurations</p> <table border="1"> <tr> <td>60 degree</td> <td>90 degree</td> <td>Spring Return</td> </tr> <tr> <td>003 OFF/ON 1 N/O 1 N/C CHANGE OVER</td> <td>105 OFF/ON 1 N/O 1 N/C</td> <td>004 OFF/ON 1 N/O 1 N/C SPRING RETURN</td> </tr> <tr> <td>001 OFF/ON 2 POLE</td> <td>002 OFF/ON 2 POLE</td> <td>008 OFF / ON 2 pole</td> </tr> <tr> <td>010 OFF/ON 3 POLE</td> <td>023 OFF/ON 3 POLE</td> <td>007 RAISE 2 LOWER ON/OFF/ON</td> </tr> <tr> <td>011 3 POSITION MULTI-STEP isolated contacts</td> <td>070 OFF/ON/START</td> <td>999 you specify DOUBLE-THROW CENTRE OFF isolated contacts</td> </tr> </table>	60 degree	90 degree	Spring Return	003 OFF/ON 1 N/O 1 N/C CHANGE OVER	105 OFF/ON 1 N/O 1 N/C	004 OFF/ON 1 N/O 1 N/C SPRING RETURN	001 OFF/ON 2 POLE	002 OFF/ON 2 POLE	008 OFF / ON 2 pole	010 OFF/ON 3 POLE	023 OFF/ON 3 POLE	007 RAISE 2 LOWER ON/OFF/ON	011 3 POSITION MULTI-STEP isolated contacts	070 OFF/ON/START	999 you specify DOUBLE-THROW CENTRE OFF isolated contacts
60 degree	90 degree	Spring Return																	
003 OFF/ON 1 N/O 1 N/C CHANGE OVER	105 OFF/ON 1 N/O 1 N/C	004 OFF/ON 1 N/O 1 N/C SPRING RETURN																	
001 OFF/ON 2 POLE	002 OFF/ON 2 POLE	008 OFF / ON 2 pole																	
010 OFF/ON 3 POLE	023 OFF/ON 3 POLE	007 RAISE 2 LOWER ON/OFF/ON																	
011 3 POSITION MULTI-STEP isolated contacts	070 OFF/ON/START	999 you specify DOUBLE-THROW CENTRE OFF isolated contacts																	

Engraving

Some switch types have common engraving. If you have special requirements Please show them in the following way at time of order.

Note: Charges may apply

"R Series" Cylinder Cam
LIW Code "PR05"

Optional Mounting Types

 Surface Box Mounting LIW Order Code "KEJB1" 100mm X 100mm X 100mm Order with Panel Mounting Only	 Water Resistant Box Mounting LIW Order Code "KEWP1" 100mm X 100mm X 100mm Order with Panel Mounting Only	 Stainless Steel Mount LIW Order Code "PZ11" 75mm X 115mm Order with Panel Mounting Only	 Clipsal 2000 Series Wall LIW Order Code "EZY WALL" 75mm X 115mm Order with Panel Mounting Only	 Flush Fit - Studless LIW Order Code "DL Studless" Diameter = 40mm Hole Size = 36mm Order with Lift Mounting Only
---------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------